


## PositionIt Model 4 Specifications




### Upright Orientation




#### Performance Specifications - Upright

	Standard Maximum Vertical Lift Capacity	Adjustable Standard Maximum Vertical Extension	Adjustable Standard Maximum Stroke Speed
<i>Standard Duty</i>	150 lbs	15 ft	4 in/sec

#### Performance Specifications Optional Payload Capacities and Stroke Speeds PositionIt Model 4 Upright Configuration

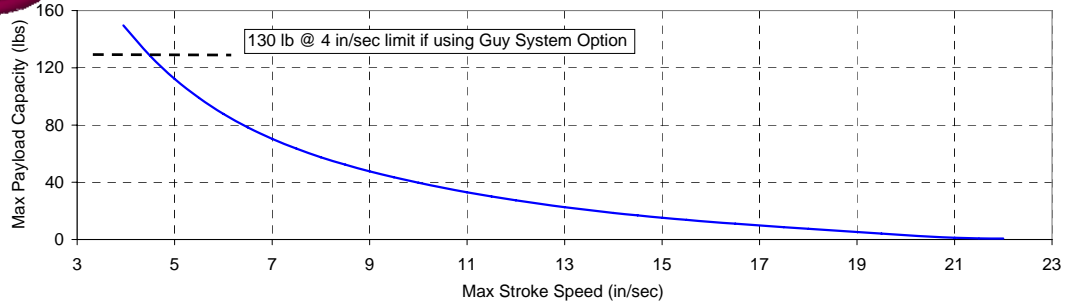


### Inverted Orientation



#### Performance Specifications - Inverted

	Standard Maximum Vertical Lift Capacity	Adjustable Standard Maximum Vertical Extension	Adjustable Standard Maximum Stroke Speed
<i>Standard Duty</i>	250 lbs	15 ft	4 in/sec

#### Performance Specifications Optional Payload Capacities and Stroke Speeds PositionIt Model 4 Inverted Configuration

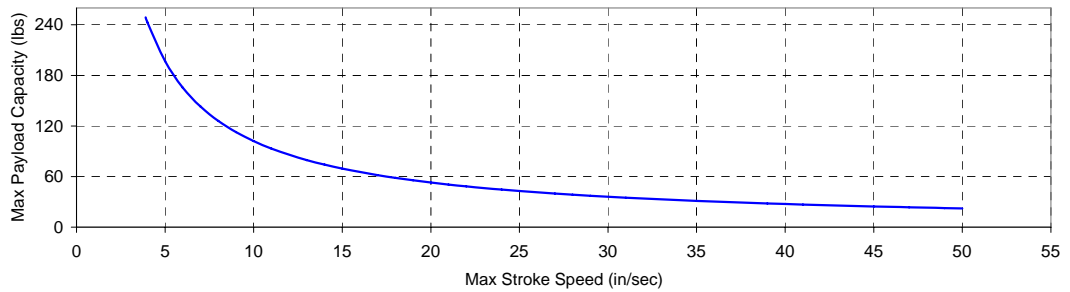

### Electrical Specifications

	Full Load Amps (A)	Variable Speed Control
<i>Standard Duty - 115 VAC</i>	3	Yes
<i>Standard Duty - 230 VAC</i>	1.5	Yes
<b>Options</b>		
12 VDC	16	Optional
24 VDC	9	Optional

### Weight Specifications

<b>Standard Duty (lbs)</b>	150
<b>Options</b>	
DMX (lbs)	3
COBRA System - Typical (lbs)	23
Dynamic Guy System (lbs)	20
Extended Column Length - 5 ft (lbs)	9
230 VAC (lbs)	0
<b>Battery Power</b>	
12 VDC	
w/o Variable Speed (lbs)	3
w/ Variable Speed (lbs)	0
24 VDC	
w/o Variable Speed (lbs)	7
w/ Variable Speed (lbs)	0
Column Cover - Standard (lbs)	15
Trailer Hitch Carrier (lbs)	60

### Mechanical Specifications

<b>Base Dimensions</b>	
Height (in)	9.8
Diameter (in)	32
<b>Retracted Unit Height</b>	
w/o COBRA System (in)	16.8
w/ COBRA System (in)	25.9
<b>Unit Mounting</b>	
Mounting Hole Pattern (in)	19.5 x 19.5
Mounting Hole Dia (in)	0.65 (x 4)
<b>Payload Mounting</b>	
Plate Thickness (in)	0.1875
w/o COBRA System	
Overall Dimensions (in)	8 x 8
Mounting Hole Pattern (in)	7 x 7
Mounting Hole Dia (in)	0.40 (x 4)
w/ COBRA System	
Overall Dimensions (in)	8 x 8
Mounting Hole Pattern (in)	5.5 x 5.5
Mounting Hole Dia (in)	0.40 (x 4)
<b>Payload Conduit ID (in)</b>	0.63

# ACTUA